



# THORIX II Flex

LED SPOTLIGHTS

# THORIX II Flex

LED spotlights



## THORIX II Flex ... as in flexible

THORIX II Flex – our new LED spotlight offers just what the name suggests: flexibility. Thanks to its stand with integrated tripod adapter, it can be used in any conceivable application. It stands firmly on the ground with its wide stand and four rubber feet. The modern optical lens system makes it possible to equip this spotlight with different beam angles. The pivotable lamp head can be fixed quickly and easily in 6° steps using a knurled screw. The power cable is a heavy-duty rubber-sheathed cable or in the case of the dimmable version, a yellow polyurethane-sheathed cable. This is fitted with a mains plug with a high protection rating (IP 68). The power cable can quickly be wound around the stand. This ensures safe transportation, further enhanced by the ergonomically positioned plastic handle on the top of the LED spotlight.

## ADDITIONAL ADVANTAGES

- ⊕ Selectable beam angle 30°, 60° or 90° (or mixed)
- ⊕ Pivotable lamp head
- ⊕ Suitable for all tripods with DIN spigot (30 mm / DIN 14640)
- ⊕ Quick to assemble and dismantle without cooling time
- ⊕ High protection rating IP 66
- ⊕ Robust design
- ⊕ Dimmable
- ⊕ Environmentally friendly and conserves resources thanks to replaceable components




## POSSIBLE APPLICATIONS

- + Building trade
- + Industry
- + Emergency and rescue services (technical relief services, police, fire service, Red Cross, etc.)
- + Event management

# THORIX II Flex


## Features

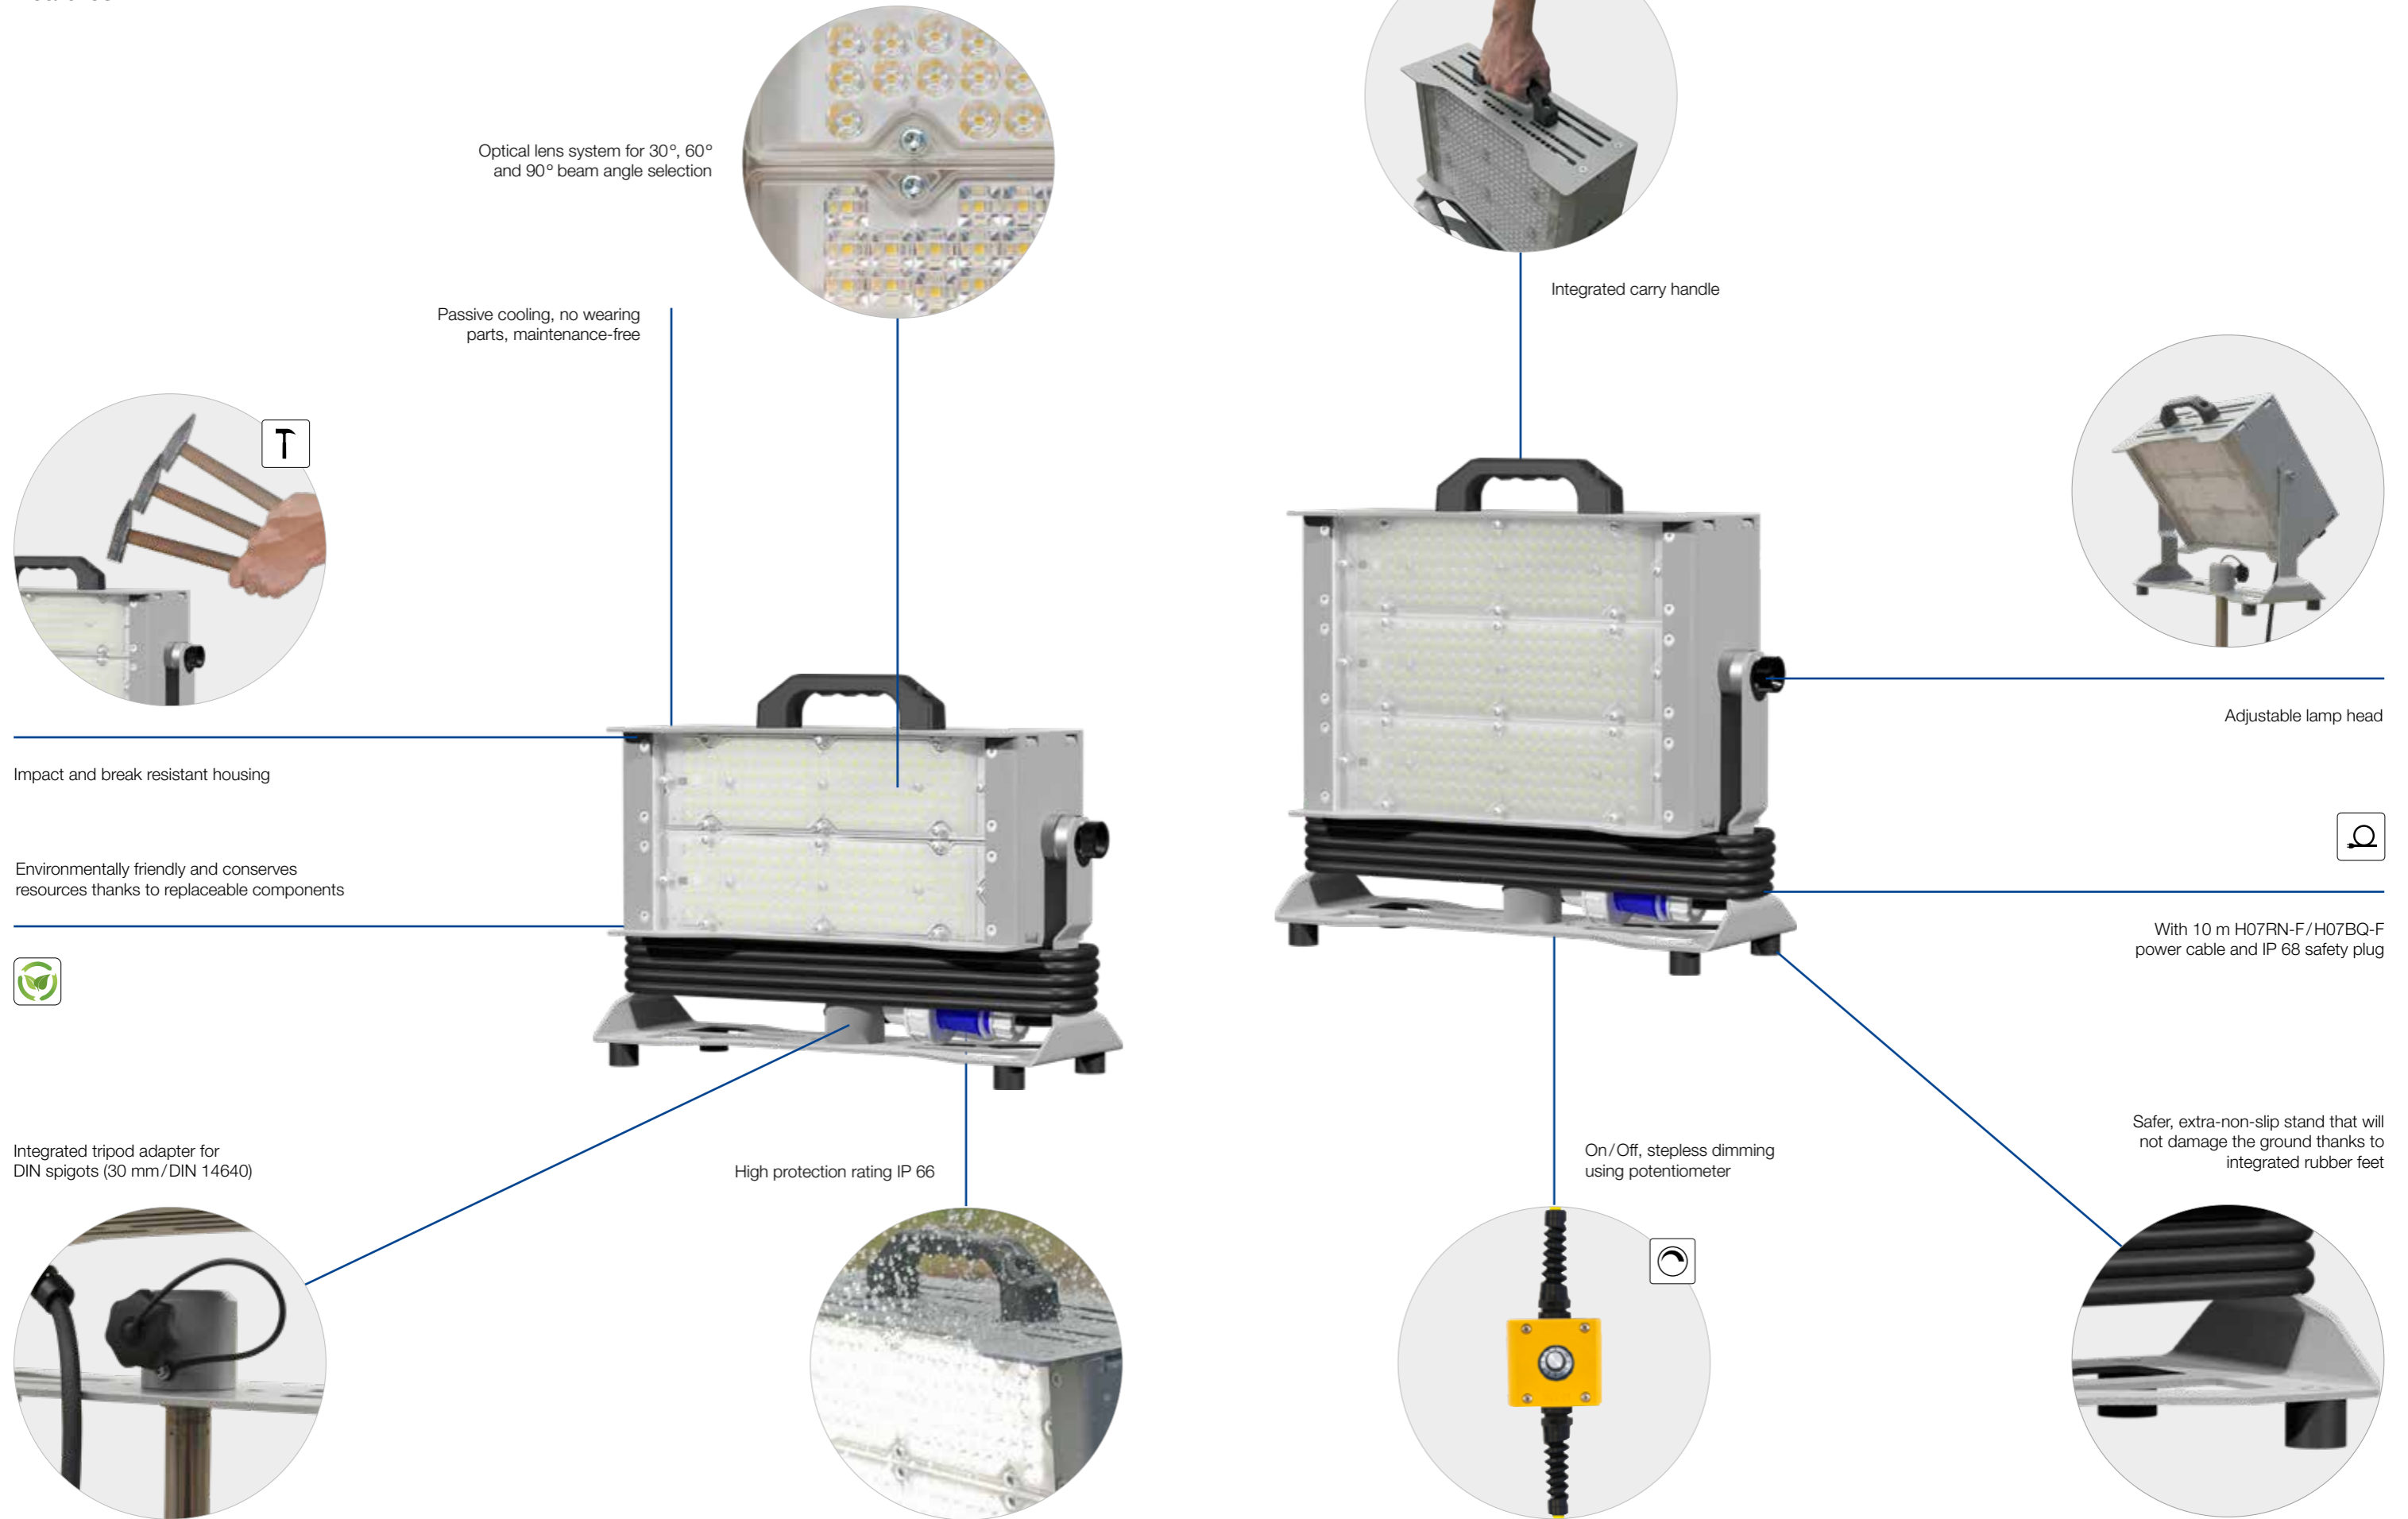



**THORIX II Flex (2-Module)**


Universal LED spotlight for mounting on a tripod or standing on the ground, housing: aluminium, silver-grey, powder-coated, stand: steel, silver-grey, powder-coated with 4 rubber feet, robust carry handle made of black plastic, lamp head finely adjustable in 6° steps, transparent PC cover with optical lens system, integrated DIN spigot adapter in accordance with DIN 14640.



L 440, B 173, H 335 mm

**THORIX II Flex (3-Module)**

Universal LED spotlight for mounting on a tripod or standing on the ground, housing: aluminium, silver-grey, powder-coated, stand: steel, silver-grey, powder-coated with 4 rubber feet, robust carry handle made of black plastic, lamp head finely adjustable in 6° steps, transparent PC cover with optical lens system, integrated DIN spigot adapter in accordance with DIN 14640.



L 440, B 173, H 420 mm



$\Phi_V$  ..... 23.000 lm effective

..... 5.000 K,  $R_a \geq 80$  LED panel

**P** ..... 180 W

..... 10 m black/yellow

**T** ..... IK08

..... E+F<sup>68</sup>

E+F<sup>68</sup>



220-240 V, 50/60 Hz

70F02301-0014	30°	-	H07RN-F	I	IP 66	8,5 kg
70F02601-0014	60°	-	H07RN-F	I	IP 66	8,5 kg
70F02901-0014	90°	-	H07RN-F	I	IP 66	8,5 kg
70F02A01-0014	30° + 60°	-	H07RN-F	I	IP 66	8,5 kg
70F02B01-0014	30° + 90°	-	H07RN-F	I	IP 66	8,5 kg
70FD2301-0014	30°	✓	H07BQ-F	I	IP 66	8,5 kg
70FD2601-0014	60°	✓	H07BQ-F	I	IP 66	8,5 kg
70FD2901-0014	90°	✓	H07BQ-F	I	IP 66	8,5 kg

h (m)	Ø (m)	E (lx)	30°	h (m)	Ø (m)	E (lx)	60°	h (m)	Ø (m)	E (lx)	90°
5	3	2228		5	7	599		5	9	497	
10	6	557		10	15	150		10	18	124	
15	10	248		15	22	67		15	26	55	
20	13	139		20	29	37		20	35	31	
25	16	89		25	37	24		25	44	20	



220-240 V, 50/60 Hz

70F03301-0014	30°	-	H07RN-F	I	IP 66	11,5 kg
70F03601-0014	60°	-	H07RN-F	I	IP 66	11,5 kg
70F03901-0014	90°	-	H07RN-F	I	IP 66	11,5 kg
70F03A01-0014	60° + 30° + 60°	-	H07RN-F	I	IP 66	11,5 kg
70F03B01-0014	90° + 30° + 90°	-	H07RN-F	I	IP 66	11,5 kg
70FD3301-0014	30°	✓	H07BQ-F	I	IP 66	11,5 kg
70FD3601-0014	60°	✓	H07BQ-F	I	IP 66	11,5 kg
70FD3901-0014	90°	✓	H07BQ-F	I	IP 66	11,5 kg

h (m)	Ø (m)	E (lx)	30°	h (m)	Ø (m)	E (lx)	60°	h (m)	Ø (m)	E (lx)	90°
5	3	3099		5	7	891		5	9	753	
10	7	775		10	15	223		10	18	188	
15	10	344		15	22	99		15	28	84	
20	13	194		20	30	56		20	37	47	
25	17	124		25	37	36		25	46	30	

$\Phi_V$  ..... 35.000 lm effective

..... 5.000 K,  $R_a \geq 80$  LED panel

**P** ..... 265 W


..... 10 m black/yellow

**T** ..... IK08

..... E+F<sup>68</sup>

E+F<sup>68</sup>



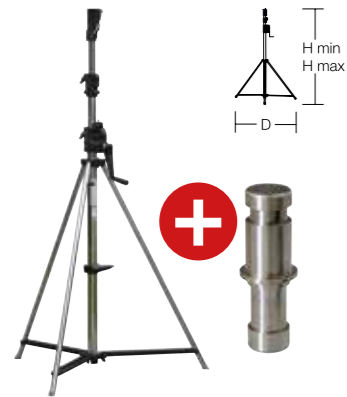

### Crank tripod "Premium"

Steel, chrome plated, suitable for 16 & 28 mm spigots, safety bolt, self braking clutch/winch, fold-away crank, one adjustable stand to compensate uneven terrain

**incl. tripod adapter** 28 mm/30 mm (DIN 14640)

Packed dimensions:  
L 1.850, B 230, H 160 mm

95-0060-0014.D H max 3800, H min 1740, D 1300 mm 22,5 kg



### Crank tripod „LightmaXX“

Galvanised steel, chrome-plated and powder-coated, with spigot adapter, automatic safety lock, 1 foot adjustable for levelling on uneven ground, self-braking coupling, fold-away elevator

**incl. tripod adapter** 28 mm/30 mm (DIN 14640)

**incl. clamping kit for tripod**

Pack dimensions:  
L 1.810, B 300, H 250 mm

95-0294-0014 H max 4130, H min 1750, D 1730 mm 25,0 kg



### Tripod "Professionell"

Stainless steel, air-cushioned for safe and comfortable operation, adjustable stand to compensate uneven terrain, with standard spigot 30 mm (DIN 14640), including bracing set (3 x rope cord and peg)

Packed dimensions:  
L 1.120, B 200, H 200 mm

95-0257-0014 H max 4450, H min 1100, D 1600 mm 13,3 kg



### Hinged feet with rubber pad

For crank tripod "Premium", stainless steel, Set (3 pieces)



95-0266-0001 0,43 kg

### Bracing set

3 x rope cord and peg

95-0267-0001 1,1 kg





## Mobiles Licht für Profis – Made in Germany

Portable light for professionals – Made in Germany

*Éclairage mobile pour les professionnels –  
Fabriqué en Allemagne*

SONLUX Lighting GmbH

Frankenhäuser Straße 66  
99706 Sondershausen  
Germany

Phone +49 3632 6522 - 0  
Fax +49 3632 6522 - 822

www.sonlux.de  
info@sonlux.de



### Tip with added value:

The digital version of this publication contains **interactive links** that lead you from the article number directly to the web.

