




Compact lights
4017506084652
L 320, B 305, H 110

portable
black

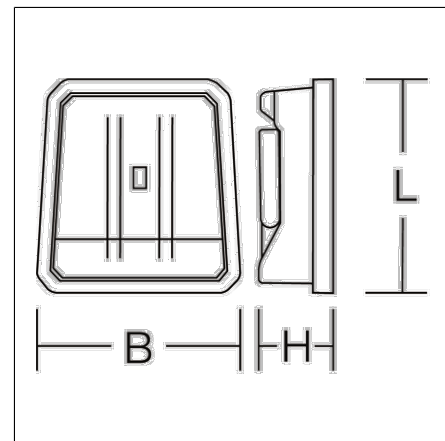

Mobile work light. Impact-resistant and break-proof 2-component plastic housing. Edge protection and handle with soft plastic (thermoplastic elastomer - TPE). Cover opal, made of impact- and break-resistant plastic (polycarbonate). Uniform, soft and glare-reduced illumination thanks to multi-LED technology, opal cover and large light emission surface. Adjustable light direction with plastic bracket (ABS). Heavy rubber power supply cable H07RN-F for high mechanical loads with mains plug. Extensive accessories optionally available (tripods, mounting rails, magnetic holders, etc.). Luminaire with limited surface temperature in accordance with EN 60598-2-24.

Product specifications

Length L	320 mm
Width B	305 mm
Height H	110 mm
Weight	2.228 kg
Supply cable / plug	5 m, H07RN-F, 2 x 1,0 mm ² / Typ E+F (CEE 7/17)
Light source	LED
Colour temperature	5000 K
Rated luminous flux	4700 lm
System power	33 W
System efficiency	142 lm/W
Glare evaluation RUG (4H 8H)	26,2
Beam angle	100°/100°
LED rated life	50000 h (L70/B50)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	4 SDCM
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	2
Luminaires on B16A fuse	3
Luminaires on C10A fuse	4
Luminaires on C16A fuse	7
Inrush current / Inrush current duration	20 A / 200 µs
CIE Flux Code / CEN Flux Code	51 82 97 100 100
Type of protection	IP 66
Protection class	II
Filament test	850°C - 30 seconds
Impact resistance	IK08 (5 Joule)
Ambient temperature	-20 °C to +30 °C
Safety marks	D-mark
Conformity mark	CE

Accessories



95-0008-0001
Tripod 'Standard', without castors, set with mounting rail for 1 work light



95-0009-0001
Tripod 'Standard', with castors, set with mounting rail for 1 work light



95-0005-0001
Tripod 'Standard', without castors, set with mounting rail for 2 work lights



95-0006-0001
Tripod 'Standard', with castors, set with mounting rail for 2 work lights



95-0003-0001
Tripod 'Standard', without castors



95-0004-0001
Tripod 'Standard', with castors



95-0061-0001
Tripod 'Profi', 3-part, extendable up to 3.20 m



90-0005-0022.1
Mounting rail for 1 work light, for tripod and wall mounting



90-0004-0022
Mounting rail for 1 or 2 work lights




95-0021-0014
Fixing device for scaffolding, with mounting rail for 1 work light



95-0007-0022
Magnetic holder, for attachment 1 or 2 work lights



95-0013-0022.2
Magnetic holder, for attachment 1 work light



95-0059-0022
Mounting plate, for 2 mounting rails



95-0310-0022
Multi-adapter for DIN spigot



95-0290-0006
Transport bag for work light

